## The BENJAMIN ArcLight Track Light Limiter Panel™

## **Specifications**

Voltage Ratings:	120V 1Ø 2W				277V 1Ø 2W			
AIC Ratings:	10kAIC @ 120V Fully Rated				6kAIC @ 277V Fully Rated			
Circuit Breaker Current Ratings (single pole):	0.5 Amp 8 Amp 32 Amp	1 Amp 10 Amp 40 Amp	2 Amp 13 Amp 50 Amp	3 Amp 15 Amp 60 Amp	4 Amp 16 Amp	5 Amp 20 Amp	6 Amp 25 Amp	7 Amp 30 Amp

Underwriters Laboratories Listed, UL508A

 $15\frac{1}{5}$ 


DOOR INSTALLED

## **Panel Dimensions**

Surface Mount Panel - up to 16 Circuits

Surface Mount Panel - up to 32 Circuits

16



DOOR INSTALLED

14


٠

FRONT VIEW WITH

DOOR INSTALLED

Ŀ

**Certification:** 



14

FRONT VIEW WITH

DOOR REMOVED

FRONT VIEW WITH SIDE VIEW DOOR REMOVED


 $-3\frac{3}{8}$ 

 $|\frac{3\frac{3}{8}}{3\frac{1}{8}}|$ 

SIDE VIEW


 $\mathbf{F} = \begin{bmatrix} \mathbf{1} & \mathbf{1} & \mathbf{1} \\ \mathbf{1} & \mathbf{1} \end{bmatrix} \begin{bmatrix} \mathbf{1} & \mathbf{1} \\ \mathbf{1} \end{bmatrix}$ 

FRONT VIEW WITH






Flush Mount Panel - up to 16 Circuits




DOOR INSTALLED



To Track 1

## Typical Wiring Diagram

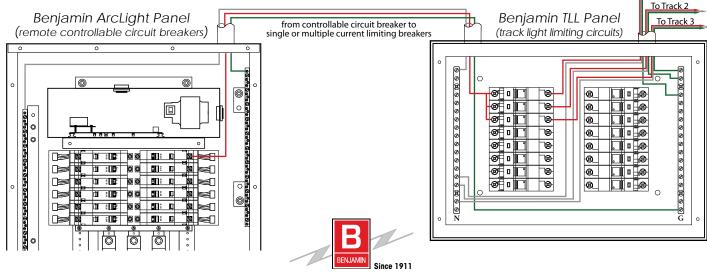

Manufacturers of Quality Electrical Power Distribution Equipment

© WA Benjamin Electric Company 2008

For additional information visit us at: www.arclightpanel.com or call 1-888-749-7731